F TENT COOPERATION TREA

	From the INTERNATIONAL BUREAU
PCT	То:
NOTIFICATION OF ELECTION (PCT Rule 61.2) Date of mailing (day/month/year)	Assistant Commissioner for Patents United States Patent and Trademark Office Box PCT Washington, D.C.20231 ÉTATS-UNIS D'AMÉRIQUE
09 November 1999 (09.11.99)	in its capacity as elected Office
International application No. PCT/SE99/00254	Applicant's or agent's file reference W 3879-001
International filing date (day/month/year)	Priority date (day/month/year)
24 February 1999 (24.02.99)	05 March 1998 (05.03.98)
Applicant	
ANDERSSON, Stig	
1. The designated Office is hereby notified of its election made. X in the demand filed with the International Preliminar	y Examining Authority on: 1999 (15.09.99) national Bureau on:
The International Bureau of WIPO 34, chemin des Colombettes	Authorized officer F. Baechler
,	r. Daeuillei

Telephone No.: (41-22) 338.83.38

Form PCT/IB/331 (July 1992)

Facsimile No.: (41-22) 740.14.35

1211 Geneva 20, Switzerland



PCT

REQUEST

The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty.

International Application No. poil/ SE 9 9 / 0 0 2 5 4

2 4 -02- 1999

International Filing Date

The Swedish Patent Office
PCT International Application

Name of receiving Office and "PCT International Application"

Applicant's or seent's file reference to 2070 001

Applicant's or agent's file reference W 3879-001 (if desired) (12 characters maximum) Box No. I TITLE OF INVENTION REFLECTING. MATERIAL **APPLICANT** Box No. II Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State This person is also inventor. of residence is indicated below.) Telephone No. Decoresponz i Helsingborg AB Facsimile No. Box 132 SE-263 22 HÖGANÄS Teleprinter No. Sweden State (that is, country) of nationality: Sweden State (that is, country) of residence: Sweden This person is applicant for the purposes of: the United States of America only the States indicated in all designated States except the United States of America all designated States the Supplemental Box FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S) Name and address: (Family name followed by given name: for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State This person is: of residence is indicated below.) applicant only ANDERSSON, Stig Lerbergsvägen 72 applicant and inventor SE-263 32 HÖGANÄS inventor only (If this check-box Sweden is marked, do not fill in below.) State (that is, country) of residence: State (that is, country) of nationality: Sweden Sweden the United States of America only the States indicated in the Supplemental Box all designated States all designated States except the United States of America This person is applicant for the purposes of: Further applicants and/or (further) inventors are indicated on a continuation sheet. AGENT OR COMMON REPRESENTATIVE; OR ADDRESS FOR CORRESPONDENCE Box No. IV The person identified below is hereby/has been appointed to act on behalf agent common representative of the applicant(s) before the competent International Authorities as: Name and address: (Family name followed by given name: for a legal entity, full official designation. The address must include postal code and name of country.) Telephone No. +46 40/757 45 STRÖM & GULLIKSSON AB Facsimile No. (any one of STROM, Tore, PETRI, Stellan, and GULLIKSSON, Jonas) +46 40/23 78 97 Box 4188 Teleprinter No. SE-203 13 MALMÖ Sweden Address for correspondence: Mark this check-hox where no agent or common representative is/has been appointed and the space above is used instead to indicate a special address to which correspondence should be sent

Sheet No. ...

2 4 -02- 1999

Box N		DESIGNATION OF STATES		•							
	ollowing designations are hereby made under Rule 4.9(a) (mark the applicable check-boxes; at least one must be marked):										
Regional Patent											
Kegioi	AP	P ARIPO Patent: GH Ghana, GM Gambia, KE Kenya, LS Lesotho, MW Malawi, SD Sudan, SZ Swaziland, UG Uganda, ZW Zimbabwe, and any other State which is a Contracting State of the Harare Protocol and of the PCT									
×	EA	Eurasian Patent: AM Armenia, AZ Azerbaijan, BY Belarus, KG Kyrgyzstan, KZ Kazakhstan, MD Republic of Moldova, RU Russian Federation, TJ Tajikistan, TM Turkmenistan, and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT									
\(\)	ЕР	European Patent: AT Austria, BE Belgium, CH and LI Switzerland and Liechtenstein, CY Cyprus, DE Germany, DK Denmark, ES Spain, FI Finland, FR France, GB United Kingdom, GR Greece, IE Ireland, IT Italy, LU Luxembourg, MC Monaco, NL Netherlands, PT Portugal, SE Sweden, and any other State which is a Contracting State of the European Patent Convention and of the PCT									
X	OA	OAPI Patent: BF Burkina Faso, BJ Benin, CF Centr GA Gabon, GN Guinea, GW Guinea-Bissau, ML Mal	di, MR d a Co	R Mauı ontract	Republic, CG Congo, CI Côte d'Ivoire, CM Cameroon, ritania, NE Niger, SN Senegal, TD Chad, TG Togo, and ting State of the PCT (if other kind of protection or treatment						
Notice	gj P.	aestrea, specify on active time) ent (if other kind of protection or treatment desired, specify (
			_		Lesotho						
X		Albania	[2] [2]								
X		Armenia	ᅜ		Lithuania Luxembourg						
X		Austria			Luxembourg						
X		Australia	図		Latvia Republic of Moldova						
X		Azerbaijan	X		Republic of Moldova						
X		Bosnia and Herzegovina	Ø		Madagascar						
M		Barbados	X	MK	The former Yugoslav Republic of Macedonia						
X		Bulgaria	_								
×		Brazil	×		Mongolia						
×	BY	Belarus	M		/ Malawi						
⊠		Canada	M		Mexico						
×		and LI Switzerland and Liechtenstein	Ø		Norway						
Ø	CN	China	X		New Zealand						
X		Cuba	×		Poland						
<u> </u>		Czech Republic	X	PT	Portugal						
Z3 ⊠		Germany	Z	RO							
123		Denmark	<u> </u>								
123 123		Estonia	<u>⊠</u>	SD	Sudan						
_		Spain	⊠ ⊠	SE	Sweden						
XI XI	ES FI	Finland	<u>2</u>	SG	Singapore						
=	FI GB		(Z)	SI	Slovenia						
⊠ ⊠		United Kingdom Grenada	<u> </u>	SK	Slovakia						
⊠ ⊠		Georgia	⊠ ⊠	SK	Sierra Leone						
⊠		Georgia	_		Tajikistan						
⊠		Ghana	124 121	TJ TM	Tajikistan						
		Gambia Greatia		-							
		Croatia	X	TR							
X	HU	5 7	X	TT	Trinidad and Tobago						
X	iD	Indonesia	3	UA							
M	IL	Israel	X		Uganda						
Ø	IN	India	Z	US	United States of America						
M	IS	Iceland	_	_							
X	JP	Japan	X		Uzbekistan						
⊠		Kenya	X		Viet Nam						
Ø		Kyrgyzstan	M		Yugoslavia						
×	KP		\boxtimes	zw	Zimbabwe						
	KR	Republic of Korea	Che a na	eck-bo ational	oxes reserved for designating States (for the purposes of all patent) which have become party to the PCT after of this sheet:						
⊠	ΚZ	Kazakhstan	_								
Ø	LC	Saint Lucia									
⊠	LK	Sri Lanka									
		Liberia	Ō								
			vations		c above the applicant also makes under Rule 4.9(b) all other						

Precautionary Designation Statement: In addition to the designations made above, the applicant also makes under Rule 4.9(b) all other designations which would be permitted under the PCT except any designation(s) indicated in the Supplemental Box as being excluded from the scope of this statement. The applicant declares that those additional designations are subject to confirmation and that any designation which is not confirmed before the expiration of 15 months from the priority date is to be regarded as withdrawn by the applicant at the expiration of that time limit. (Confirmation of a designation consists of the filing of a notice specifying that designation and the payment of the designation and confirmation fees. Confirmation must reach the receiving Office within the 15-month time limit.)

Sheet No. .3.....

D N 1/1	PDIODITY C				☐ Further pri	ority claims are indicated	in the	Supplemental Box.
Box No. VI	PRIORITY C		Number		T draici pri	Where earlier applicat		
of earlier	g date application		ier applicatio	n	national application:	regional application:*		national application:
(day/mo	nth/year)	l			country	regional Office		receiving Office
item (1) 05 05/03/98	March 98	98006	89-3	- !	Sweden			
item (2)								
item (3)		· ·					 	
				 1			ļ	
of the ear	rlier application() of the present in	s) (only if ternationa	the earlier a l application	pplic is the	nit to the International E action was filed with the ereceiving Office) ident	e Office which for the ified above as item(s):		
* Where the ear Convention for	rlier application is the Protection of l	an ARIPO Industrial Pi	application, it roperty for wh	is mu uch th	andatory to indicate in the at earlier application was	Supplemental Box at least filed (Rule 4.10(b)(ii)). See	one co Suppl	emental Box.
Box No. VII	INTERNATIO			AUT	HORITY			
lif two or more	ernational Searc e International Se arry out the intern	archine Au	thorities are	Req	uest to use results of e	arlier search; reference or requested from the Inte	rnation	at Searching Authorny).
the Authority cl	hosen; the two-lett	er code ma	y be used):		e (day/month/year)	Number		ntry (or regional Office)
ISA / SE	•		•	<u> </u>	/03/98	SE 98/00199		Sweden
	CHECK LIS					t d b v db v isom(s) mos	kad ba	low
	onal application on number of shee		• •			anied by the item(s) mar	ked be	low.
request	: 3	3 /	1. fee c			,		
description (e	xcluding) L			signed power of attorney	y; reference number, if a	nv:	
sequence listin		V			eneral power of attorne, explaining lack of sign		, -	
claims	•	V				Box No. VI as item(s):		
abstract		- * - */	_		n of international applic			
drawings sequence listing		. •				eposited microorganism	or oth	er biological material
of description		•				uence listing in computer		
Total numbe	r of sheets: 15	; v	9. dothe					
	drawings which				nguage of filing of the ernational application:	Swedish		
Box No. IX	SIGNATURE	OF APP	LICANT OF	R AG	ENT			<u> </u>
Next to each sign	nature, indicate the r	name of the p	person signing a	and the	e capacity in which the perso	n signs (if such capacity is not	obvious	from reading the request).
Malmö	, Februar	y 23,	1999					
8 .4								
Same	antest	~						
Stella	an Petri							
				For r	eceiving Office use only	<u> </u>	_	2. Drawings:
internatio	ctual receipt of the				2 4 - 02- 199			z. Drawings.
timely rec	date of actual re ceived papers or rted internationa	drawings o	completing					
correction	mely receipt of the sunder PCT Ar	ticle (1(2)	:			 		not received:
	nal Searching Au more are compe			È.	until s	nittal of search copy dela earch fee is paid.	yea	
	ipt of the record	сору			emational Bureau use of CH 1999	(3 1. 03. 99)		

SÖKANDE:

Decoresponz i Helsingborg AB

UPPFINNINGENS BENÄMNING: REFLEKTERANDE MATERIAL

5

10

15

20

25

30

35

Föreliggande uppfinning avser ett material för varmformning samt användning av detta material vid framställning av en reflekterande produkt medelst varmformning.

Under utövning av olika aktiviteter i mer eller mindre dålig belysning är det viktigt för den utövande personen att vara väl synlig. För närvarande skyddar man sig numera endast nödtorftigt med olika typer av reflexer för att vara synlig vid dåliga ljusbetingelser. Detta gäller inte enbart för många typer av fritidsaktiviteter, såsom cykling och ridning, utan även vid mer yrkesutövande aktiviteter, som för exempelvis brandmän eller byggnadsarbetare, vilka behöver skydda sig med adekvata reflexer under sin yrkesutövning. I detta sammanhang avses med en "reflex" en reflexion av ljus som återkastas i riktningar, som ligger nära belysningsriktningen.

Det är speciellt viktigt i den hektiska trafikmiljö som numera förekommer att skydda huvudet; detta gäller för såväl barn som vuxna. Konventionella hjälmar ger emellertid ingen hjälp att enkelt upptäckas av t ex motorförare vid dåliga ljusförhållanden, och användaren kan även om han använder hjälm riskera att skadas i en trafikolycka vid sådana tillfällen. För att varna en motorförare under dessa förhållanden finns det nu olika typer av reflekterande varningsmärken kommersiellt tillgängliga, som är synliga på natten då de belyses.

Ordinära, plana reflexer har emellertid en begränsat skyddande effekt i och med att de enbart avger ljus då träffas av ljus från ett enda håll. Visserligen förekommer det olika slags självhäftande, reflekterande tejp, som kan fästas på t ex klädesplagg eller hjälmar. Emellertid kan ett självhäftande material, såsom en dekal, p.g.a. veckbildning ej appliceras på en välvd yta. Ej heller kan det

av samma skäl appliceras på ett arkformigt material som därefter medelst varmformning anbringas på en välvd yta, eftersom materialet då kommer att spricka eller krackelera. På grund av ovan nämnda problem förlorar reflekterande material enligt känd teknik, som applicerats på oregelbundna eller välvda ytor, därför snabbt sina reflekterande egenskaper.

Det avses sålunda att genom uppfinningen åstadkomma ett reflekterande material som kan användas både som ett reflekterande plant ark i sig och som ett material vid varmformning, företrädesvis vid vakuumformningen, till en välvd eller oregelbunden yta, varvid materialet bibehåller sin reflekterande förmåga utan sprickbildning eller krackelering.

I detta syfte har materialet enligt uppfinningen erhållit de kännetecken, som framgår av patentkravet 1, och dess användning har erhållit de kännetecken, som framgår av patentkravet 14.

För närmare förklaring av uppfinningen hänvisas till bifogade ritning, på vilken

FIG 1 schematiskt visar ett tvärsnitt genom ett arkformigt reflekterande material enligt uppfinningen,

15

20

25

30

FIG 2 schematiskt visar ett tvärsnitt av en vidareutveckling av den i FIG 1 visade utföringsformen av materialet enligt uppfinningen,

FIG 3 schematiskt visar ett tvärsnitt genom en alternativ utföringsform av materialet enligt uppfinningen, och

FIG 4 schematiskt visar ett tvärsnitt genom ett material enligt en föredragen utföringsform av uppfinningen.

I FIG 1 visas materialet enligt uppfinningen i sin enklaste form och består av ett plant ark 1, som är belagt med ett reflekterande skikt 2. Arket 1 kan vara av alla typer av plast. Emellertid föredrages att arket utgöres av ett transparent, termoplastiskt polymermaterial, före-

trädesvis glasklar polyvinylklorid (PVC) eller polyester, varvid polyestern torde användes eftersom det att den är mer miljövänlig.

Det reflekterande skiktet 2 består av en suspension av pärlor, exempelvis av glas eller plast, i en vidhäftande substans, företrädesvis en lack. Med lack avses i detta sammanhang en opigmenterad vätska med ett organiskt filmbildande ämne, som kan vara en naturharts, en syntethats eller en olja, och företrädesvis användes en s k screentryckslack.

10

15

20

25

30

35

Det är en viktig aspekt av uppfinningen, att pärlor av lämplig storlek blandas med en vidhäftande substans. Företrädesvis har pärlorna en diameter mellan 0,01 och 0,05 mm. Den vidhäftande substansen måste kunna fästa på plasten samtidigt som den skall kunna binda till pärlorna och utgör således en etsande, glasklar limbeläggning. Med etsning avses i detta sammanhang en ökning av den använda plastens ytråhet genom upplösning av densamma. Efter appliceringen av det reflekterande skikt 2 härdas den vidhäftande substansen i form av en lack, företrädesvis med värme, men den kan även härdas på andra sätt, t ex genom bestrålning.

För att ett reflekterande laminerat material enligt uppfinningen skall kunna erhållas, blandas vidhäftande substans och pärlor av exempelvis glas eller plast till en suspension, vilken måste ha en passande konsistens för att pärlorna av mikroskopisk storlek skall kunna överföres till det plana arket 1 medelst känd teknik i form av duktryck. Detta är en metod som normalt användes för att anbringa ett mönster på ett plastark, som skall utsättas för termoformning. Pärlornas storlek är således även avpassade att kunna passera genom de öppna hålen i en dukstencil, som normalt användes för att pressa ett mönstermedium mot arket. Då de använda pärlorna är av glas måste dessa vara polerade pärlor av hög kvalitet. Lämpligen användas samma typ av

2 4 -02- 1999

glaspärlor som i förekommande reflekterande tejp. Företrädesvis ligger glaspärlornas storlek inom området 0,01-0,05 mm.

Genom detta förfarande förankras suspensionen på det plana materialet, varvid en reflexyta åstadkommes. Ju fler pärlor som kan inblandas i suspensionen desto bättre reflexverkan erhålles. Härvid kunde den i den vidhäftande substansen i form av en lack suspenderade mängden glaspärlor överraskande utgöra så mycket som 85 %. Detta medför, att det åtgår ca 1 kg glaspärlor för att täcka $4-5~\text{m}^2$ av arket, vilket efter termoformning exempelvis kan utnyttjas till skal för ca 50 hjälmar av normalstorlek.

Materialet enligt uppfinningen enligt denna utföringsform kan även utnyttjas att åstadkomma en reflex åt två håll genom att det reflekterande skiktet appliceras på bägge sidorna av en lämplig yta. Lämpligen är denna yta ett ark av plastmaterial, som kan termoformas. Företrädesvis användas alla slags förekommande material av polyvinylklorid (PVC), dvs samtliga termoplastiska material som utgöres av polymerer av vinylklorid. Även utan termoformning kan det plana, reflekterande materialet användas i form av t ex ett vägmärke eller annat varningsmärke, som anger fara eller andra förhållanden som bör observeras av allmänheten.

15

20

25

30

När det reflekterande skiktet 2 på arket 1 har applicerats, kan andra motiv tryckas på materialet enligt uppfinningen. Därefter varmformas dessa, t ex genom vakuumformning, till en form, som motsvarar de välvda ytor, som de bildade skalen är avsedda att passa till. Det termoplastiska materialet enligt uppfinningen i form av en plan eller flexibel skiva eller folie av en för vakuumformning tillräcklig tjocklek uppvärmes härvid till varmformningstemperaturen för detsamma och formas till den generella konturen hos ett formverktyg med hjälp av en tryckdifferens. Vakuumformning utföres således med känd

teknik vid 130 °C, varvid materialet drages och spännes ut till skal, som har formen av exempelvis en hjälm.

Efter avsvalning av de bildade tunna skalen sågas dessa till enskilda enheter, och hål stansas eventuellt i dem. Om skalen skall användas till en färdig produkt i form av en hjälm, limmas slutligen skalen på en innerhjälm, som besitter den för huvudet skyddande effekten.

Hjälmen kan därefter, om så önskas, byggas in med ytterligare ett lager av plast. Detta kan vara nödvändigt, eftersom den faktiska reflexen kan dämpas, t ex vid fuktig väderlek. Därför lägges ytterligare en beläggning (coating) på den färdiga produkten, dvs ett lager som medför att det reflekterande skiktet skyddas och förstärkes än mer. Detta kan åstadkommas genom att, så som visas i FIG 2, ett ytterligare skikt 3 av företrädesvis PVC medelst exempelvis högfrekvenssvetsning anbringas på det reflekterande skiktet 2, som i sin tur är anordnat på det plana arket 1.

En mer kostnadseffektiv utföringsform av uppfinningen enligt FIG 1 visas i FIG 3, varvid liksom ovan utnyttjas ett plant ark 1 av företrädesvis ett vakuumformbart plastmaterial. I denna utföringsform är på arket 1 anordnat ett skikt 4a av vidhäftande substans, på vilket ett tunt skikt 5 av pärlor är applicerat. Över detta skikt av pärlor är ånyo ett skikt 4b av vidhäftande substans anordnat.

20

25

Skikten 4a och 4b utgöres företrädesvis av samma transparenta, glasklara vidhäftande substans i form av en lack, varvid lacken i skiktet 4a är etsande så som i föregående utföringsformer.

Med hänvisning till FIG 3 åstadkommes det reflekterande laminerade materialet genom att det etsande skiktet 4a av vidhäftande substans appliceras på arket 1. Innan detta skikt har torkat fördelas pärlor på detsamma. Detta kan exempelvis åstadkommas maskinellt med en utrustning som vanligtvis utnyttjas för att belägga med olika slags pulver. Härvid skakas t ex glaspärlor så att de faller ned

på det fortfarande klibbiga skiktet 4a, varigenom ett monologer av glaspärlor kommer i kontakt med detsamma med ej vidhäftande pärlor ovanpå. Arket med tillhörande skikt 4a och 5 får därefter lov att passera en ugn för härdning av den vidhäftande substansen i skiktet 4a. När väl detta härdats, kan ej vidhäftande glaspärlor sugas av och återanvändas. Ett nytt skikt 4b med vidhäftande substans appliceras därefter på glaspärleskiktet 5, varefter arket med tillhörande skikt ånyo får lov att passera ugnen för härdning av skiktet 4b.

Även materialet enligt denna utföringsform av uppfinningen kan vakuumformas till ett reflekterande skal att appliceras på en välvd yta utan att någon krackeleringen sker under formningsförfarandet. Den reflekterande ytan är för många tillämpningar tillräckligt effektiv för att en effektiv reflexverkan skall kunna erhållas.

10

20

25

30

I FIG 4 visas en utföringsform, som är speciellt föredragen då materialet enligt uppfinningen skall utnyttjas för reflekterande hjälmar. Genom att anordna produkten i form av ett skal från materialet enligt uppfinningen t ex på insidan av en cykelhjälm, i vilken urtagningar gjorts för det reflekterande materialet, kan den reflekterande produkten användas på ett mer från omgivningen skyddat ställe. Detta åstadkommes i denna utföringsform genom att skikten hos materialet enligt uppfinningen är anordnade på den sida av arket 1 som ej i den färdiga hjälmen kommer att vara riktad mot belysningskällan, dvs arket 1 fungerar som skyddande skikt för övriga skikt.

Med hänvisning till FIG 4 är ett färgskikt 6 anordnat mellan arket 1 och skiktet 4a av vidhäftande substans. Färgskiktet 6 utgöres av en transparent (genomsynlig) färg som är känd inom tekniken och som kan uteslutas i beroende av slutproduktens design och utseende. Det reflekterande skiktet 5 är så som i föregående utföringsform anordnat i

form av ett enda lager av pärlor, exempelvis av glas eller plast, mellan två skikt, 4a och 4b, av vidhäftande substans. Den använda vidhäftande substansen torde härvid kunna etsa såväl färg som plast.

För att förstärka reflexen ytterligare är ett skikt 7 av ett material med hög glans, t ex av silver eller aluminium, anordnat på skiktet 4b av vidhäftande substans. Företrädesvis användes aluminiumpartiklar. Då det reflekterande skiktet 5 belyses, kommer således det ljus som inte omedelbart återkastas av detta skikt att reflekteras med en total reflektans av skiktet 7 och vidarebefordras mot betraktaren efter refraktion av pärlorna i skiktet 5.

Skiktet 7 påföres, företrädesvis i form av en kommersiell pasta aluminiumpartiklar, laminatet enligt uppfinningen medelst ovan nämnda kända teknik i form av duktryck.

10

Det reflekterande laminerat materialet enligt uppfinningen kan därefter upphettas till en för vakuumformning lämplig temperatur, t ex 130 °C, varefter vakuumformning utföres så som beskrivits ovan. Det arkformiga reflekterande material enligt uppfinningen måste härvid ha en tillräcklig tjocklek med tanke på den efter vakuumformning tilltänkta produkten. Exempelvis kan materialet vakuumformas till ett hjälmskal som blir högreflekterande från utsidan med det reflekterande skiktet på insidan av hjälmen, vilket därmed kommer att skyddas från all typ av skadegörelse. Sålunda kan en hjälm av slagtålig plast erhållas med såväl reflekterande mönster som sedvanliga mönster, vilket kan medföra en ökad trafiksäkerhet, speciellt för barn.

Det bör påpekas, att ett färgskikt, om så önskas, kan anordnas på motsvarande sätt i övriga utföringsformer av uppfinningen. Färgskiktets placering i lamellatet är härvid inte avgörande. En färg kan även iblandas suspensionen av pärlor och vidhäftande substans, varvid en reflex av färgen

erhålles. Färgerna bör härvid även vara transparenta. Vidare är det av vikt att samtliga transparenta beståndsdelar i materialet enligt uppfinningen bibehåller denna egenskap efter varmformning, såsom vakuumformning.

5

10

15

. 25

Varnande artiklar, som tillverkats medelst föreliggande uppfinning, erbjuder en reflekterande konstruktion som är varaktig, relativt billig och väl synlig under dåliga, naturliga ljusförhållanden, speciellt på natten då de reflekterande elementen lysas upp av en yttre, aktiv ljuskälla, såsom ljuset från en bilstrålkastare. Genom att materialet enligt uppfinningen kan vakuumformas kan uppfinning utnyttjas för ökad säkerhet, speciellt i trafiken. Produkter med en oregelbunden eller välvd yta kan framställas med en ändamålsenlig reflexverkan då föreliggande uppfinning utnyttjas. Sålunda kan allehanda ljusreflekterande produkter åstadkommas, såsom cykelhjälmar bygghjälmar, lekhjälmar för barn etc. Uppfinningen kan således utnyttjas som ett reflekterande material med förmåga att reflektera ljus och därmed bli synlig från alla håll, dvs ett retroreflekterande material som alstrar en reflex i alla riktningar och som således kan användas som en personreflex. Även andra produkter för ökad trafiksäkerhet där en heltäckande och reflekterande yta önskas, såsom navkapslar med dekor och reflekterande mönster, kan erhållas med användande av uppfinningen.

PATENTKRAV

- Material för varmformning, k ä n n e t e c k n a t av att materialet utgöres av ett skikt (2, 5) av
 reflekterande pärlor i en vidhäftande transparent substans
 vilket på sin ena sida är anordnat i anslutning till ett
 första plastskikt (1).
 - 2. Material enligt krav 1, k ä n n e t e c k n a t av att i anslutning till den andra sidan av skiktet (2) av reflekterande pärlor i en vidhäftande transparent substans är anordnat ett andra plastskikt (3).

10

20

- 3. Material enligt krav 1, kännetecknat av att den vidhäftande substansen utgöres av ett första och ett andra skikt (4a, 4b) omgivande ett skikt (5) av reflekterande pärlor, varvid det första skiktet (4a) är anordnat i anslutning till det första plastskiktet (1).
- 4. Material enligt krav 3, kännetecknat av att pärlorna i skiktet (5) är anordnade i ett enda lager.
- 5. Material enligt något av föregående krav, kännetecknat av att pärlorna är av glas eller plast.
 - 6. Material enligt något av föregående krav, känneteck nat av att pärlorna har en diameter mellan 0,01 och 0,05 mm.
 - 7. Material enligt något av kraven 1-3, k ä n n e t e c k n a t av att plastskiktet (1, 3) är transparent.
- 8. Material enligt krav 6, känne tecknat av att plastskiktet (1, 3) utgöres av polyvinylklorid eller polyester.
 - 9. Material enligt krav 8, kännetecknat av att då det andra plastskiktet (3) utgöres av polyvinylklorid detta är fäst vid den andra sidan av skiktet (2) av reflekterande pärlor i en vidhäftande transparent substans medelst högfrekvenssvetsning.

- 10. Material enligt något av kraven 1-3, kännet e c.k n a t av att den vidhäftande substansen är en etsande lack.
- 11. Material enligt krav 10, känne teckna t s av att lacken är en s k screentryckslack.
 - 12. Material enligt något av kraven 1-3, kännetecknat av att ett skikt (6) av en transparent färg är anordnat i anslutning till det första plastskiktet (1).
- 13. Material enligt krav 3, kännetecknat

 10 av att ett skikt (7) av partiklar med total reflektans är

 anordnat i anslutning till sagda andra skikt (4b) av

 vidhäftande substans.
 - 14. Material enligt krav 13, kännetecknat av att partiklarna med total reflektans är aluminiumpartiklar.
 - 15. Material enligt något av kraven 1-14, kännetecknat av att materialet är en plan skiva eller folie.
- 16. Användning av ett material enligt något av kraven 1-15 vid framställning av en reflekterande produkt medelst varmformning.
 - 17. Användning enligt krav 16, k ä n n e t e c k n a d av att varmformningen är vakuumformning.
- 18. Användning enligt krav 17, k ä n n e t e c k 25 n a d av att vakuumformningen utföres till en välvd yta.
 - 19. Användning enligt krav 18, känneteckn ad av att den välvda ytan har formen av en hjälm.


15


SAMMANDRAG


Ett material för varmformning utgöres av ett plastskikt samt ett skikt av reflekterande pärlor i anslutning till en vidhäftande transparent substans. Materialet är lämpligt att användas vid framställning av en reflekterande produkt medelst varmformning.


10

Publiceras med FIG 4.

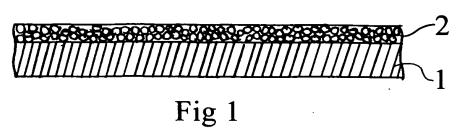

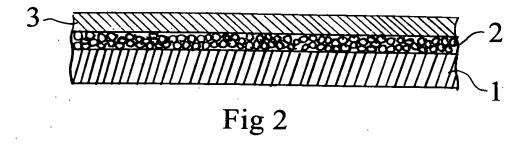

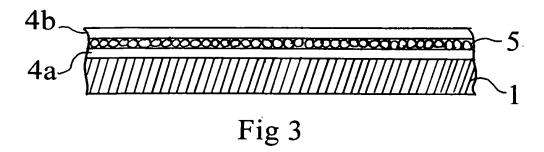

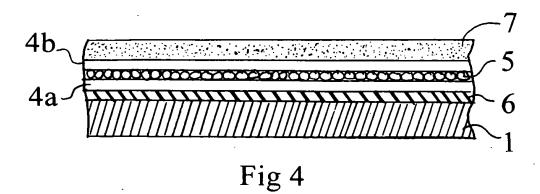



10

25

35

CLAIMS

- 1. Material for thermoforming, characterized in that the material comprises a layer (2,5) of reflecting pearls in an adhering transparent substance which on one of its sides is arranged adjacent to a first plastic layer (1).
 - 2. Material as in claim 1, c h a r a c t e r i z e d in that a second plastic layer (3) is arranged adjacent to the other side of the layer (2) of reflecting pearls in an adhering transparent substance.
 - 3. Material as in claim 1, c h a r a c t e r i z e d in that the adhering substance comprises a first and a second layer (4a, 4b) surrounding a layer (5) of reflecting pearls, the first layer (4a) being arranged adjacent to the first plastic layer (1).
 - 4. Material as in claim 3, character-i zed in that the pearls in the layer (5) are arranged as a monolayer.
- 5. Material as in any of claims 1-4, c h a r a c t e r i z e d in that the pearls are made of glass or plastic.
 - 6. Material as in any of claims 1-5, character is ed in that the pearls have a diameter between 0.01 and 0.05 mm.
 - 7. Material as in any of claims 1-3, characterized in that the plastic layer (1,3) is transparent.
- 8. Material as in any of claims 1-3, c h a r a c 30 t e r i z e d in that the plastic layer (1,3) comprises polyvinyl chloride or polyester.
 - 9. Material as in claim 8, c h a r a c t e r i z e d in that when the second plastic layer (3) comprises polyvinyl chloride this layer is attached to the other side of the layer (2) of reflecting pearls in an

adhering transparent substance by means of high-frequency welding.

- 10. Material as in any of claims 1-3, characterized in that the adhering substance is an etching lacquer.
- 11. Material as in claim 10, character i z e d in that the lacquer is a screen printing lacquer.
- 12. Material as in any of claims 1-3, character ized in that a layer (6) of a transparent dye is arranged adjacent to the first plastic layer (1).
 - 13. Material as in claim 3, characterized in that a layer (7) of particles with total reflectance is arranged adjacent to said other layer (4b) of adhering substance.
- 15 14. Material as in claim 13, characterized in that the particles with total reflectance are aluminium particles.
- 15. Material as in any of claims 1-14, characterized in that the material is a plane sheet or a 20 foil.
 - 16. Use of a material as claimed in any of claims 1-15 for the manufacturing of a reflecting product by means of thermoforming.
- 17. Use as in claim 16, characterized in that the thermoforming is vacuum forming.
 - 18. Use as in claim 17, characterized in that vacuum forming is accomplished to a curved surface.
 - 19. Use as in claim 18, characterized in that the curved surface has the form of a helmet.

30



PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

		nt's file reference	FOR FURTHER ACTION		ation of Transmittal of International Examination Report (Form PCT/IPEA/416)
W 3879-0					T
Internationa			International filing date (day/month	vyear)	Priority date (day/month/year) 05/03/1998
PCT/SES			24/02/1999		05/03/1996
International G02B5/1		nt Classification (IPC) or na	tional classification and IPC		
G0265/1	20				
	_				
Applicant					
DECOR	SPO	NZ I HELSINGBORG	AB		
1. This i	nterna s trans	ational preliminary exam smitted to the applicant a	ination report has been prepared according to Article 36.	d by this Inte	ernational Preliminary Examining Authority
2. This	REPO	RT consists of a total of	5 sheets, including this cover s	heet.	
l t	een a	mended and are the bas	ed by ANNEXES, i.e. sheets of the sis for this report and/or sheets of 07 of the Administrative Instructi	containing re	n, claims and/or drawings which have ectifications made before this Authority ne PCT).
Thes	e ann	exes consist of a total of	12 sheets.		
		•			
3. This	report	contains indications rela	ating to the following items:		
	531	Basis of the report			
111		•	opinion with regard to novelty, in	ventive step	and industrial applicability
iv		Lack of unity of inventi			
V	⊠	Reasoned statement u	under Article 35(2) with regard to ions suporting such statement	novelty, inv	entive step or industrial applicability;
vi		Certain documents cit	ted		
\ vii	\boxtimes	Certain defects in the	international application		
VIII	Ø	Certain observations of	on the international application		
		·			·
Date of su	bmissi	on of the demand	Date of	f completion o	f this report
15/09/1	999		07.07.2	2000	
		ng address of the internation nining authority:	nal Author	ized officer	LEGISON MICHAEL ST. C.
	, D-ε	ropean Patent Office 30298 Munich +49 89 2399 - 0 Tx: 5236		enna, P	(Table of the state of the stat
		, +49 89 2399 • U TX; 5230; ,, +40 80 2300 - 4465	Jo epina a	No 40 (BO 2200 2201

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/SE99/00254

l.	Basis	of the	report
----	--------------	--------	--------

1. This report has been drawn on the basis of (substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments.): Description, pages: 1-9 as published Claims, No.: 13/06/2000 with letter of 08/06/2000 as received on 1-13 Drawings, sheets: 1/1 as published 2. The amendments have resulted in the cancellation of: ☐ the description, pages: ☐ the claims, Nos.: ☐ the drawings, sheets: 3. This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

4. Additional observations, if necessary:

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/SE99/00254

- V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- 1. Statement

Novelty (N)

Yes:

Claims 1-13

No:

Claims

Inventive step (IS)

Yes: Claims 1-13

No:

Claims

Industrial applicability (IA)

Yes:

Claims 1-13

No: Claims

2. Citations and explanations

see separate sheet

VII. Certain defects in the international application

The following defects in the form or contents of the international application have been noted:

see separate sheet

VIII. Certain observations on the international application

The following observations on the clarity of the claims, description, and drawings or on the question whether the claims are fully supported by the description, are made:

see separate sheet

Re Item V

Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. The subject-matter of independent claim 1, if it is understood in accordance with point VIII-2 below, differs from the disclosure of the closest prior art document D10 (US 4 025 159 A) in that the "reflecting layer" (2,5) (see figures) and the "first transparent layer" (1) are continuously adherent one to the other and shaped by means of thermoforming so that after cooling they have a curved or irregular shape like a helmet, whereas in D10 thermoforming is used to make the layers (11,15) and (12) adhere by means of pressing these layers between heated platens, one of which being the embossing plate (19) (see D10, col.3, lines 52-54), so that the layers result to be adherent only in some portions, like the grid (13) of fig.1.

The above described production process of the sheet of D10 is not suited to shape the layers of D10 in a curved shape like a helmet. In fact, D10 does not explicitly mention the intent to give to the sheet a curved shape, the aim being rather the production of plane sheetings (see figures) having sealed cells in order to prevent the penetration of moisture onto the retroreflecting layer: these cells would break if the sheeting were bent or curved.

- 2. None of the further available prior art documents suggest to modify the apparatus of D1 in a way which would lead to the subject-matter of claim 1. In particular, none of these documents mention neither explicitly the use of thermoforming for shaping a retroreflective sheeting, nor the necessity of preforming a retroreflecting sheeting in a curved or irregular shape: in all the cases in which the fitting of a retroreflecting sheeting to a curved or irregular surface is provided, this is achieved by means of a retroreflective adhesive tape (see for example D1, D3, D4, D7), rather than with a sheeting which has been previously heated, preformed and cooled.
- 3. As a consequence the subject-matter of independent claim 1 meets the criteria of Art.33(3) PCT in respect of inventive step.
- 4. The other claims 2-13 are dependent claims, which define more detailed

embodiments.

Re Item VII

Certain defects in the international application

- 1. Since document D10 is not identified in the description and the relevant background art disclosed therein is not discussed, the criteria of Rule 5 (1) (a) PCT are not met.
- 2. Since the independent claims are not drafted in the two-part form, which in the present case would be appropriate, with those features known in combination from the prior art (document D10) being placed in a preamble and with the remaining features being included in a characteristic part, Rule 6.3 (b) PCT, Rule 6.3 (b) (i) PCT and Rule 6.3 (b) (ii) PCT are not met.

Re Item VIII

Certain observations on the international application

- It appears that the formulation "use of a material" in all the claims could be better expressed by a formulation defining a "method of manufacturing" a reflecting layer.
- 2. The expression "adjacent to" in independent claim 1, line 6, does not make clear whether the "reflecting layer" is in continuous contact and adherent on its whole surface to the "first transparent layer" of line 7, or whether it is just proximate, without being adherent to the "reflecting layer" on its whole surface. However, it appears from all the embodiments (see figs.1-4) that these two layers are placed in close and continuous contact one with the other. This definition is essential for the performing of the invention.

10

15

20

35

CLAIMS

- 1. Use of a material comprising a reflecting layer (2,5) of pearls of transparent glass or plastic at least partially embedded in an adhering transparent substance, said layer being arranged at one side thereof adjacent to a first transparent plastic layer (1) comprising polyvinyl chloride or polyester, for manufacturing, by means of thermoforming, a retro-reflecting shell which, after cooling, has a curved or irregular surface shaped as a helmet with the capability of reflecting light in all directions.
- 2. Use as in claim 1, characterized in that the thermoforming is vacuum forming.
- 3. Use as in claim 1 or 2, characterized in that the material is a plane sheet or a foil.
- 4. Use as in claim 1 or 2, c h a r a c t e r i z e d in that a second transparent plastic layer (3) comprising polyvinyl chloride or polyester is arranged on the other side of the layer of pearls, opposite to said first transparent plastic layer (1).
- 5. Use as in claim 1 or 2, c h a r a c t e r i z e d in that the adhering substance comprises a first and a second layer (4a, 4b) surrounding the layer (5) of pearls, the first layer (4a) being arranged adjacent to said first transparent plastic layer (1).
- 6. Use as in claim 5, characterized in that the pearls in the layer (5) form a monolayer.
- 7. Use as in any of claims 1-6, charac30 terized in that the pearls have a diameter between 0.01 and 0.05 mm.
 - 8. Use as in claim 4, c h a r a c t e r i z e d in that when the second plastic layer (3) comprises polyvinyl chloride it is high-frequency welded to the reflecting layer (2).

ANTENDED SHELT

- 9. Use as in any of claims 1-8, characterized in that the adhering transparent substance is a lacquer.
- 10. Use as in claim 9, characterized in that the lacquer is a screen printing lacquer.
 - 11. Use as in any of claims 1-5, character ized in that a layer (6) of a transparent dye is arranged adjacent to said first transparent plastic layer (1).
- 10 12. Use as in claim 5, c h a r a c t e r i z e d in that a high gloss material layer (7) is arranged adjacent to said second layer (4b) of the adhering substance opposite to the reflecting layer (5) of pearls.
- 13. Use as in claim 12, characterized in that the high gloss material layer (7) comprises aluminium particles.



WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

1244 (24-25-4)		(11) International Publication Number: WO 99/45413
(51) International Patent Classification 6:		(11) International Publication Number: WO 99/45413
G02B 5/128	A1	(43) International Publication Date: 10 September 1999 (10.09.99)
(21) International Application Number: PCT/SE (22) International Filing Date: 24 February 1999 ((30) Priority Data: 9800689-3 5 March 1998 (05.03.98) (71) Applicant (for all designated States except US): I SPONZ I HELSINGBORG AB [SE/SE]; P.O. S-263 22 Höganäs (SE). (72) Inventor; and (75) Inventor/Applicant (for US only): ANDERSS (SE/SE); Lerbergsvägen 72, S-263 32 Höganäs (SE). (74) Agents: STRÖM, Tore et al.; Ström & Gullikssom Box 4188, S-203 13 Malmö (SE).	DECOR Box 1:	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SI, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report. Before the expiration of the time limit for amending the
(54) Title: REFLECTING MATERIAL 4b 4a (57) Abstract A material for thermoforming comprises a plastic The material is suitable for the manufacturing of a reflect	layer a	yell-as a layer of reflecting pearls in an adhering transparent substance.

The second of th

PCT/SE99/00254 WO 99/45413

REFLECTING MATERIAL Field of the Invention

The present invention refers to a material for thermoforming as well as to the use of this material for the manufacturing of a reflecting product by means of thermoforming. Background of the Invention

10

While performing different activities during more or less bad lighting, it is important for a person performing the activities to be completely visible. At present, a person can obtain a lower degree of protection by different types of reflex tapes, so as to be visible during poor light conditions. This does not only apply to different types of spare time activities, such as bicycling and horse riding, but also to activities related to employment, such as for instance firemen and policemen, which have to protect themselves with adequate reflector means when working professionally under conditions with low levels of lighting. In this connection a "reflector means" 20 accomplishes a reflection in which light is reflected in directions close to the direction from which it came.

In the nowadays existing traffic environment, it is especially important to protect the head, and this applies to children as well as grown-ups. However, conventional helmets are not easily noticed, for example, by motorists at night, and the user may risk injury from a traffic accident on such occasions even if a helmet is used. In order to alert a motorist under these conditions, several types of reflecting warning signs, which are visible at night, are now commercially available.

Ordinary plane reflector means, however, have a limited protecting effect by only emitting light when struck by light from only one direction. It is true that different kinds of adhesive reflecting tapes exist which can be fastened for example on clothes or helmets. However, a self-adhesive material, such as a sticker; cannot be

applied to a curved surface due to the formation of wrinkles. On the same grounds, it can neither be applied to a material in the form of a sheet which subsequently is fixed onto a curved surface by means of thermoforming, since the material then will crack or crackle. Due to the above mentioned problems, reflecting materials according to the state of the art rapidly loose their reflecting properties when applied to irregular or curved surfaces.

The purpose of the invention is thus to provide a reflecting material which can be used both as a reflecting plane sheet per se and as a material for thermoforming, preferably by means of vacuum forming, to a curved or irregular surface, the material retaining its reflecting property without crack formation or cracking. In order to achieve this purpose, the invention has obtained the characterizing features of claim 1 and its use has obtained the characterizing features of claim 16.

In order to explain the invention in more detail, reference is made to the accompanying drawing, in which fig 1 schematically shows a cross section through a reflecting material in the form of a sheet according to the

20

invention,

FIG 2 schematically shows a cross section through a further development of the embodiment of the material according to the invention, which is shown in FIG 1,

FIG 3 schematically shows a cross section through an alternative embodiment of the material according to the invention, and

material according to a preferred embodiment of the invention.

invention. Detailed Description of the Danwings
In FIG 1 the material according to the invention is
shown in its most simple form, and consists of a plane
sheet 1 which is coated with a reflecting layer 2. The
35 sheet 1 can be of every type of plastic material. However,

ຳ າ

PCT/SE99/00254 WO 99/45413

it is preferred that the sheet comprises a transparent thermoplastic polymer material, preferably crystal-clear polyvinyl chloride (PVC) or polyester, the polyester being preferred since it is more harmless to the environment.

The reflecting layer 2 comprises a suspension of pearls, for example of glass or plastic, in an adhering substance, preferably a lacquer. In this connection a lacquer means a non-pigmented liquid with an organic film forming substance which can be a natural resin, a synthetic resin or an oil. Preferably a so-called screen printing lacquer is used.

It is an important aspect of the invention that pearls of a certain size are mixed with the adhesive substance. Preferably, the pearls have a diameter between 0.01 and 0.05 mm. The adhesive substance must be able to attach to the plastic at the same time as it shall be able to bind to the pearls. Thus, the adhering substance comprises an etching transparent glue coating. In this connection etching refers to an increase in surface roughness of the plastic by dissolution of the same. After the application of the reflecting layer 2, the adhering substance in the form of a lacquer is hardened, preferably by means of heat, but it can also be hardened in other ways, for example by means of radiation.

In order to obtain a reflecting laminated material according to the invention, the adhering substance and pearls of for example glass or plastic are mixed into a suspension which must have a suitable consistency so that the pearls of microscopic size will be transferred to the 30 plane sheet 1 by means of a known technique in the form of screen printing (silk screen processing). This is a method which normally is used for applying a pattern to a plastic sheet which is to be subjected to thermoforming. The size of the pearls is thus also adapted to be able to pass through the open holes of a screen stencil which normally ...

5

10

25

is used for pressing a pattern medium against the sheet. When the pearls used are of glass, they must be polished pearls of high quality. The same type of glass pearls as in existing reflecting tapes can be used with advantage. Preferably, the size of the glass pearls lies within the range of 0.01-0.05 mm.

By this procedure, the suspension is anchored on the plane material, a reflecting surface being obtained. The more pearls mixed into the suspension, the better reflectance is achieved. In this connection the amount of glass pearls suspended in the adhering substance in the form of a lacquer could surprisingly comprise as much as 85 %. This results in the consumption of 1 kg glass pearls for covering 4-5 m² of the sheet, which after thermoforming for example can be used for shells for about 50 helmets of normal size.

The material according to the invention can in this embodiment also be used for achieving a reflection in two directions, by the reflective layer being applied to both sides of a suitable surface. It is of advantage if this surface is a sheet of plastic material which can be thermoformed. Preferably all kinds of existing materials of polyvinyl chloride (PVC) are used, i.e. all thermoplastic materials which comprise polymers of vinyl chloride. The plane reflecting material can also be used without thermoforming in the form of a traffic sign or another warning sign indicating danger or other circumstances which should be observed by the public.

when the reflective layer 2 has been applied to the sheet 1, other patterns can be printed on the material according to the invention. This is then thermoformed, for example by means of vacuum forming, to a shape corresponding to the curved surfaces, which the shells thus formed are intended to fit. The thermoplastic material according to the invention, in the form of a plane or

flexible sheet or foil of a thickness which is sufficient for vacuum forming, is then heated to its vacuum forming temperature and formed to a general contour of a mould by means of a pressure difference. Thus, vacuum forming is performed by means of known techniques at 130 °C, the material being drawn and stretched to a shell which for example has the shape of a helmet.

After cooling, the thin shells formed are sawn into separate units, and holes are optionally punched out in them. If the shells are to be used in a finished product in the form of a helmet, the shell is finally glued onto an inner helmet which has a protective effect on the head.

The helmet can then, if desired, be built in with a further plastic layer. This can be necessary since the virtual reflection can be reduced, i.e. in humid weather. For this reason a further coating is applied to the finished product, e.g. a layer which protects the reflecting layer and strengthens it even more. As shown in FIG 2, this can be achieved by a further layer 3 of preferably PVC being applied by means of for example high-frequency welding to the reflecting layer 2 which in turn is disposed on the plane sheet 1.

A more cost-efficient embodiment of the invention according to FIG 1 is shown in FIG 3, a plane sheet 1 of preferably a plastic material being used as above, said material being workable by means of vacuum forming. In this embodiment a layer 4a of an adhering substance is disposed on the sheet 1, and a thin layer 5 of pearls is applied to the layer 4a. A further layer 4b of an adhering substance is again disposed over this layer 5 of pearls.

The layers 4a and 4b preferably consist of the same transparent glass-clear adhering substance in the form of a lacquer, the lacquer in the layer 4a being etching as in the previous embodiment.

1. The Carlotte St. Carlotte St

With reference to FIG 3, the reflecting laminated material is achieved by the etching layer 4a of adhering substance being applied to the sheet 1. Pearls are spread onto this layer before it has dried. This can for example 5 be accomplished mechanically with an equipment which usually is utilised for coating with different kinds of powders. Glass pearls are for example spread in this procedure so that they will fall down onto the still sticky layer 4a, a monolayer of glass pearls contacting the same 10 with non-adhering pearls on the top. The sheet with accompanying layers 4a and 5 is then allowed to pass an oven for curing of the adhering substance in the layer 4a. When this layer has been cured, non-adhering glass pearls can be sucked off and reused. Another layer 4b of adhering substance is then applied to the layer 5 of glass pearls, the sheet with accompanying layers then being allowed to pass the oven again for curing of the layer 4b.

The material according to this embodiment of the invention can also be vacuum formed into a reflecting shell to be applied to a curved surface without any crackle formation taken place during the forming procedure. The reflecting surface is sufficiently well adapted for many applications in order to provide for an efficient reflecting effect.

25

In FIG 4 an embodiment is shown which is especially preferred when the material according to the invention is to be used for reflecting helmets. By arranging the product in the form of a shell from the material according to the invention for example on the inside of a bicycle helmet, in which holes have been cut out for the reflecting material, the reflecting product can be used where it is more protected from the surrounding world. In this embodiment this can be achieved by a layer of the material according to the invention being arranged on that side of the sheet 1 which in the finished helmet will not be directed towards

6

the light source, i.e. the sheet 1 acts as a protecting layer for the other layers.

With reference to FIG 4, a colour layer 6 is arranged between the sheet 1 and the layer 4a of an adhering substance. The colour layer 6 comprises a transparent dye known in the art, which can be excluded in dependence of the design and appearance of the final product. The reflecting layer is arranged as in the preceding embodiment in the form of a single layer of pearls, for example of glass or plastic, between two layers, 4a and 4b, of adhering substance. In this connection the adhering substance used should be able to etch dyes as well as plastics.

A layer 7 of a material with high gloss, for example silver or aluminium, is disposed on the layer 4b of adhering substance in order to further amplify the reflection. Preferably, aluminium particles are used. Thus, when the reflecting layer 5 is illuminated, the light not immediately reflected by this layer will be reflected with total reflectance by the layer 7 and re-transmitted towards the observer after reflection by the pearls in the layer 5.

The layer 7 is preferably applied to the laminate according to the invention as a paste of commercial aluminum particles by means of the above-mentioned technique in the form of screen printing.

The reflecting laminated material according to the invention can then be heated to a temperature which is suitable for vacuum forming, e.g. 130 °C, vacuum forming then being performed as described above. The reflecting material in the form of a sheet according to the invention must in this connection have a thickness which is sufficient considering the product contemplated after vacuum forming. The material can for example be vacuum formed into a shell in the form of a helmet which becomes highly reflecting from the outside with the reflecting

ခြင့်သည်။ ဆားသောင်သည်။

layer on the inside of the helmet, the reflecting layer thus being protected against all types of damages. In this way a helmet of impact-resistant plastic can be achieved with reflecting patterns as well as usual patterns, which can result in increased road safety, especially for children.

It should be observed, that a colour layer, if desired, can be arranged in a corresponding way in other embodiments of the invention. In this connection the location of the colour layer in the laminate is not crucial. A dye can also be mixed into the suspension of pearls and adhering substance, a reflection of the corresponding colour then being obtained. In this connection the dyes should also be transparent. Furthermore, it is important that all transparent components in the material according to the invention

components in the material according to the invention retain this property after thermoforming, such as vacuum forming.

Warning articles manufactured from the material of

the present invention present a reflective construction which is durable, rather cheap and quite visible under poor natural light conditions, especially at night, when the reflecting articles are illuminated by an external active light source, such as a light from a head light of a car.

By the vacuum forming property of the inventive material, the invention can be used for increased safety, especially on the roads. Products having an irregular or curved surface can be produced with a functional reflectance when the present invention is used. Thus, all kinds of light reflecting products can be achieved, such as bicycle helmets, protective helmets for building workers and playing children, and so on. Accordingly, the invention can be used as a reflective device with the capability of reflecting light and thus being visible from all angles,

5 i.e. a retro-reflecting device generating a reflection in:

PCT/SE99/00254

WO 99/45413

all directions and usable on a person as such. Other products for increased road safety can also be obtained by using the invention when a more or less completely reflecting surface is desired, such as hub caps with ornaments and reflective patterns.

9

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
ΑT	Austria	FR	France	LU	Luxembourg	SN	Senegal
ΑÜ	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
ΑZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA		GE	Georgia	MD	Republic of Moldova	TG	Togo
ВВ	_	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE		GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of Americ
CA		IT	Italy	MX	Mexico	UZ	Uzbekistan
CF		JP	Japan	NE	Niger	VN	Viet Nam
CC	Congo	KE	Kenya	NL	Netherlands	YU	Yugosłavia
CI	•	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CN			Republic of Korea	PL	Poland		
CN		KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
C2		LC	Saint Lucia	RU	Russian Federation		
DI		LI	Liechtenstein	SD	Sudan		
DI	Denmark	LK	Sri Lanka	SE	Sweden		
EF		LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

International application No. PCT/SE 99/00254

A. CLASS	IFICATION OF SUBJECT MATTER					
TPC6 · G	02B 5/128 International Patent Classification (IPC) or to both nati	onal clas	ssification and IPC			
	S SEARCHED					
	ocumentation searched (classification system followed by	classifica	tion symbols)			
IPC6: G						
	ion searched other than minimum documentation to the o	extent th	at such documents are included in	the fields searched		
	I,NO classes as above					
Electronic da	ata base consulted during the international search (name o	of data b	ase and, where practicable, search	terms used)		
EPODOC						
C. DOCU	MENTS CONSIDERED TO BE RELEVANT					
Category*	Citation of document, with indication, where appr	ropriate	, of the relevant passages	Relevant to claim No.		
A	FR 2356166 A2 (BOULARD REMY MARI 20 January 1978 (20.01.78),			1-9,11		
			;			
A	FR 2716008 A1 (YOU CHING CHYR ET 11 August 1995 (11.08.95), f		s 2,6, claim 1	1-4		
A				1-4,6-9,13, 14		
ļ						
		_				
Furth	er documents are listed in the continuation of Box	C.	See patent family anne	x.		
"A" docum	ent defining the general state of the art which is not considered	-T-	date and not in conflict with the appli	cation but cited to understand		
"E" critier of	locument but published on or after the international filing date ent which may throw doubts on priority claim(s) or which is	*X*	considered novel or cannot be consid	ered to involve an inventive		
"O" docum means	reason (as specified) cnt referring to an oral disclosure, use, exhibition or other	*Y*	considered to involve an inventive ste combined with one or more other suc	p when the document is in documents, such combination		
	document published prior to the international filing date but later than the priority date claimed "&" document member of the same patent family					
Date of th	e actual completion of the international search	Date o	of mailing of the international	search report		
10 1	1000		1 3 <i>-</i> 07- 1	999		
		Autho	rized officer			
1		T	- Candal, (CE			
COMPANY), 20 March 1997 (20.03.97), figures 1,2, claims 1,13 Further documents are listed in the continuation of Box C. Special categories of cited documents A document defining the general state of the art which is not considered to be of particular relevance E criter document but published on or after the international filing date cited to establish the publication date of another citation or other special reason (as specified) O document referring to an oral disclosure, use, exhibition or other means P document published prior to the international filing date but later than						

INTERNATIONAL SEARCH REPORT Information on patent family members

International application No.

03/05/99 PCT/SE 99/00254

Publication date		Patent family member(s)		Publication date	Patent document cited in search report		
	-		NON	20/01/78	A2	2356166	FR
03/07/95	Α	1245695	AU	11/08/95	A1	2716008	FR
17/08/95	A,C	4404645	DE				
09/08/95	A,B	2286152	GB				
00/00/00	D	9401911	GB				
28/05/98	В	691831	AU				
27/03/95	Α	7540894	AU				
09/04/96	Α	9407429	BR				
26/06/96	Α	0717863	EP				
07/05/96	Α	961062	FI				
04/03/97	T	9502282	JP				
07/03/96	A	960933	NO				
30/10/98	В	174961	PL				
24/06/96	A	313353	PL				
09/07/97	A	28796	SK				
01/04/97	A	6690096	AU	20/03/97	A1	9710279	WO
20/03/97		2229784	CA			- -	
14/10/98	A	1196067	CN				
01/07/98		0850259	EP				
08/07/97		5645938	US				